


**3162-00 - Rotary vane pump**  
**CRVpro 16**  
Order code: **8010.3162-00**

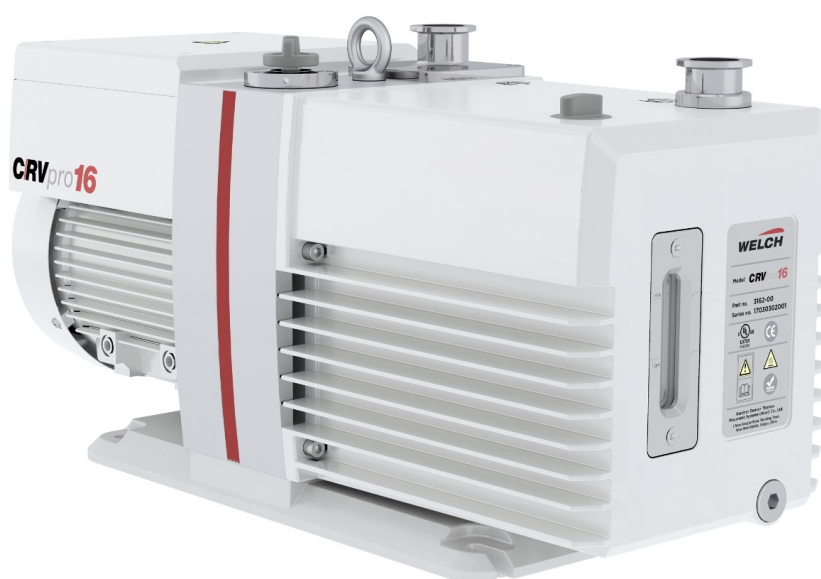

Cena bez DPH	3.600,00 Eur
Price with VAT	4.356,00 Eur

Parameters

Pumping rate [l/min]	280
Threshold pressure [kPa]	$3 \times 10^{-4}$
Vacuum pump	Rotary oil sealed
Ultimate Pressure [Torr]	$2 \times 10^{-3}$
Quantitative unit	ks

The robust vacuum pump CRVpro 16 belongs to the new high-performance two-stage rotary vane pumps generation of Welch. The pump impresses with its long service life, absolute reliability and its low maintenance requirements.

This has been enabled thanks to 3 major innovations:

- Its low running temperature, which slows down potential corrosion processes and reduces the oil consumption.
- Its large oil reservoir ensures a low chemical concentration, which contributes to the prolongation of the oil exchange intervals.
- Its special inside coating increases the chemical resistance of the pump.

**Scope of delivery:**

- Pump with motor
- 3 line cords (EU/UK/US)
- 3 liters of oil
- centering ring with dirt trap
- centering ring
- 2 clamping rings

#### Technical Data

- Max. pumping speed at 50 Hz in m<sup>3</sup>/h (l/min): 16.8 (280)
- Max pumping speed at 60 Hz in m<sup>3</sup>/h (l/min): 20.2 (336)
- Max. pumping speed at 60 Hz in cfm (l/min): 11.9 (336)
- Ultimate pressure in mbar (Torr) without gas ballast:  $3 \times 10^{-3}$
- Ultimate pressure in mbar (Torr) with gas ballast:  $5 \times 10^{-3}$
- Intake connection: DN 25 KF
- Exhaust connection: DN 25 KF
- Sound level (dB): 55
- Dimensions (W/D/H) in mm: 569/206/289
- Oil capacity in ml: 2400
- Operating temperature in °C: 10-40
- Weight kg (lbs): 37 (81.6)
- Ship weight in kg (lbs.): 42 (92.6)
- Shipping carton dimensions (W/D/H) in mm: 680/381/381